


Dodge Ram 1500/2500/3500 | 1981-1993

Car Radio Removal

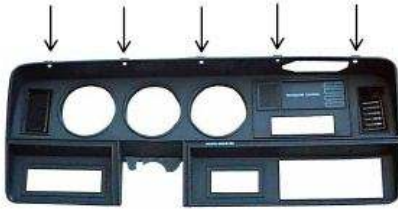

NOTE:

To remove the radio, the entire plastic dash panel must be removed. There are 5 phillips screws at the top of the dash, and 1 phillips screw located directly above the radio.



STEP 1:

Locate and remove (5) phillips screws securing the top of the dash panel above the instrument display.



STEP 2:

Locate and remove (1) phillips screw located directly above the radio.



STEP 3:

Once all screws have been removed, the plastic dash panel can be pulled away from the main body of the dash.

Tilt the steering wheel to its lowest position. As seen in the photo above, grab the top corners of the dash panel and pull it forward. The bottom of the dash panel is snapped into place. Pull the dash and lift it above the steering wheel to remove it completely.



STEP 4:

The radio should now be visible. The radio is held in with either (2) two phillips screws or 10 mm bolts. Remove both to free the radio. Unplug the antenna wire and (2) two dash wire harness connectors that snap into the rear of the radio. A metal braid ground strap secured to the back of the radio with (1) one 10 mm bolt must be removed. The radio is now free to be completely removed from the dash.

