


Nissan 300Z | 1990 Car Radio Removal



STEP 1:

To remove the radio, the plastic dash panel surrounding the radio must be removed. Directly above the radio is a plastic cover snapped into the plastic dash panel. This plastic cover (approximately 7" x 3/4") has a snap at each end. With a flat head screwdriver, pry up the plastic cover at one end until it unsnaps from the plastic dash panel.

Locate and remove two (2) phillips screws that were hidden under the plastic cover.

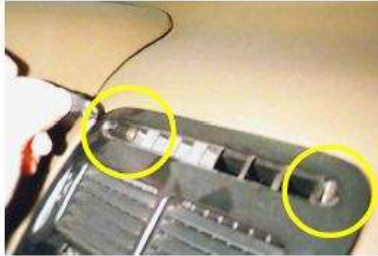

STEP 2:

Now move to the top of the plastic dash panel. At the top right and left corners are two (2) plastic covers also snapped into the plastic dash panel. Unsnap both of these plastic covers.

Locate and remove two (2) phillips screws that were hidden under the 2 plastic covers.



STEP 3:

When all 4 screws have been removed, the dash plastic dash panel can be pulled from the center of the dash. Pull the dash off. You will notice that the bottom of the dash has wires attached to the rear of the digital clock mounted to the bottom of the plastic dash panel. You do not have to disconnect the wires attached to the clock so you can set the plastic dash panel off to the passenger side of the dash and leave the plastic dash panel hanging by the wires attached to the clock.



STEP 4:

The radio is attached to either a pocket below the radio or a speaker box located in the same location by metal brackets on each side of the radio/pocket assembly. To remove the radio you will have to remove the screws that secure the metal brackets to the dash. Locate and remove six (6) phillips screws securing the metal brackets to the dash (2 below the pocket/speaker and 4 secure the sides of the radio - 2 on each side of the radio).

Once all 6 screws have been removed, pull the radio/pocket assembly out of the dash.

Unplug the black plastic cable plugged into the rear of the Nissan radio. Unplug 2 white connectors plugged into the rear of the Nissan radio. Unplug any other connectors attached to the radio/pocket assembly. The radio should now be able to be completely removed from the vehicle.